

AP 系列放大器




你的眼睛会欺骗你
但是你的耳朵不会



AP2 2 通道系列




AP2 系列 2-通道		AP2-140	AP2-280	AP2-500	AP2-800	AP2-3000	
SE 模式 CH1 + CH2	RL: 4 Ω	2 x 140 W	2 x 280 W	2 x 490 W	2 x 810 W	2 X 3000 W	
	RL: 8 Ω	2 x 140 W	2 x 280 W	2 x 245 W	2 x 410 W	2 x 1500 W	
	RL: 2 Ω	-	-	-	2 x 900 W	2 x 1500 W	
BTL 模式	RL: 4 Ω	140 W	280 W	1050 W	1400	-	
	RL: 8 Ω	140 W	280 W	900 W	1500	-	
	70 V RMS	140 W	250 W	1000 W	1500	-	
	100 V RMS	120 W	240 W	1000 W	1500	-	
阻抗 (8Ω load)		> 225 (1 kHz)	> 350 (1 kHz)	> 1000 (1 kHz)	>350 (1 kHz)	>400 (20 - 500Hz)	
输出电路		D类具有超低失真信号的全频率PWM调制器				-	
噪声比 (20 Hz - 20 kHz, 8 Ω load)		> 119 dB		> 120 dB	> 119 dB	-	
THD+N (典型)		< 0.05 % (20 Hz - 20 kHz, 8Ω load, 3 dB below rated power)					
频率响应		20 Hz - 20 kHz (+0/-0.25 dB, 8Ω load, 3 dB below rated power)					-
保护		保护短路保护、直流保护、低压保护、温度保护、过载保护					Turn-on transients, Over-heating, DC, RF, Short-circuit, mismatched loads, ICL™, PMS™
操作电压		85 - 265V					
尺寸 (mm)		446,5 x 360,50 x 88 需要2U (88mm高) 机架, 深度为17.58 英寸 (446,5mm).					

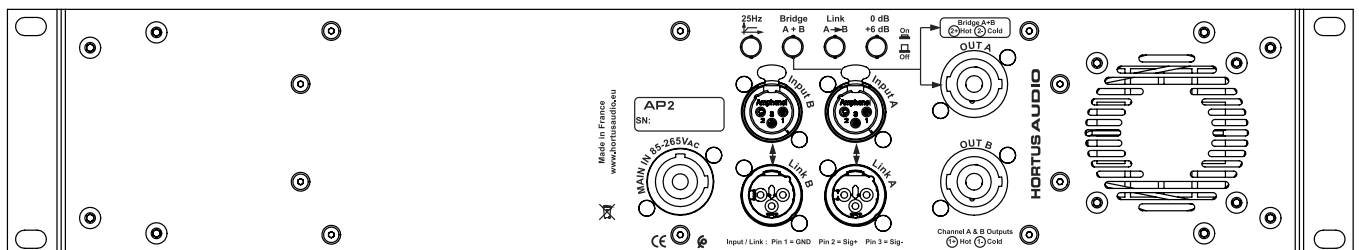

AP4 4通道系列



AP4 系列 4-通道		AP4-140	AP4-280	AP4-500	AP4-800
SE 模式 CH1 + CH2	RL: 4 Ω	4 x 140 W	4 x 280 W	4 x 490 W	4 x 810 W
	RL: 8 Ω	4 x 140 W	4 x 280 W	4x 245 W	4 x 400 W
	RL: 2 Ω	-	-	-	4 x 900 W
BTL 模式	RL: 4 Ω	2 x 140 W	2 x 280 W	2 x 1050 W	2 x 1400
	RL: 8 Ω	2 x 140 W	2 x 280 W	2 x 900 W	2 x 1500
	70 V RMS	2 x 140 W	2 x 250 W	2 x 1000 W	2 x 1500
	100 V RMS	2 x 120 W	2 x 240 W	2 x 1000 W	2 x 1500
阻抗 (8Ω load)		> 225 (1 kHz)	> 350 (1 kHz)	> 1000 (1 kHz)	>350 (1 kHz)
输出电路		D 类具有超低失真信号的全频率 PWM 调制器			
噪声比 (20 Hz - 20 kHz, 8Ω load) THD+N (典型值)		> 119 dB		> 120 dB	> 119 dB
频率响应		< 0.05 % (20 Hz - 20 kHz, 8Ω load, 3 dB below rated power)			
保护		20 Hz - 20 kHz (+0/-0.25 dB, 8Ω load, 3 dB below rated power)			
操作电压		保护短路保护、直流保护、低压保护、温度保护、过载保护			
尺寸 (mm)		85 - 265V			
		446,5 x 360,50 x 88 需要2U (88mm 高)机架, 深度为 17.58英寸(446,5mm).			

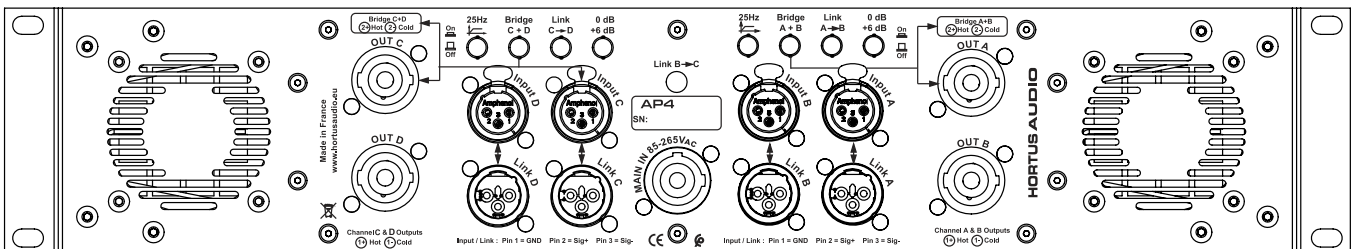



地址：广州市白云区集贤庄路集安街3号凯云商务中心806室
 电话：020-86187780/86187783
 邮箱：sales@hxaudio.com
 网址：www.hxaudio.com